



AQUA EXIT OR SORTIE COMBO

Weatherproof Combo

Project Name: _____

Model Number: _____

Prepared By: _____

Date: _____


FEATURES & BENEFITS

- NEMA 4X SEA MR16 heads are standard
- Durable and corrosion-resistant fiberglass
- Heater available for cold environments
- Fully gasketed NEMA 4X housing
- Temperature Range: +10 to +40°C. With heater option added: -20 to +40°C
- CSA 22.2 No. 141-15 Performance Certified

EXTERNAL SPECIFICATIONS

The AQUA housing is constructed from durable, corrosion resistant fiberglass. The NEMA 4X housing is fully gasketed for wet location applications and is supplied standard in a grey finish. Four polycarbonate pressure screws firmly hold the polycarbonate lens in place. Wall, ceiling or end mounting configurations are available (ceiling and end mount versions come complete with a factory installed weatherproof steel canopy). Single or double face versions must be specified. Removable universal chevrons are standard on each unit.

DIMENSIONS

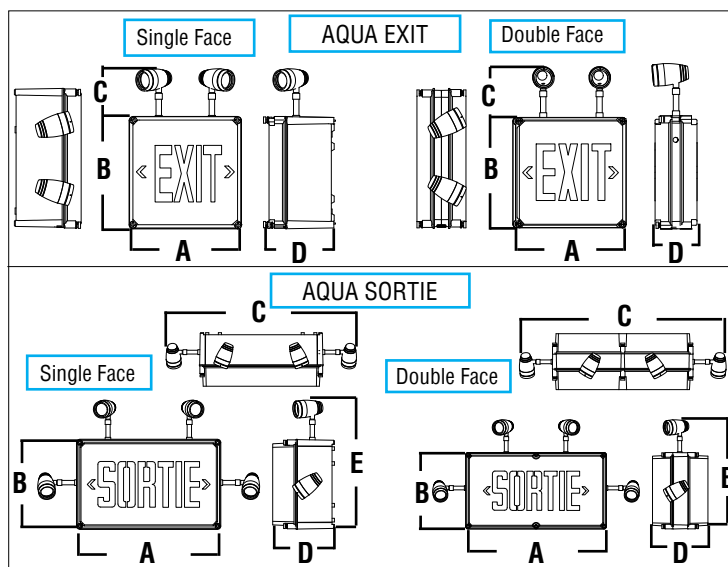

AQUA EXIT	A	B	C	D	
Single Face	298mm (11 3/4")	298mm (11 3/4")	133mm (5 1/2")	178mm (6 7/8")	
Double Face	298mm (11 3/4")	292mm (11 1/2")	140mm (5 1/2")	127mm (5")	
AQUA SORTIE	A	B	C	D	E
Single Face	498mm (19 1/4")	305mm (12")	749mm (29 1/2")	210mm (8 1/4")	432mm (17")
Double Face	552mm (21 3/4")	298mm (11 3/4")	813mm (32")	216mm (8 1/2")	140mm (16 3/4")

BATTERY TECHNOLOGY

The AQUA is designed with a maintenance free, valve regulated sealed lead-acid battery providing emergency lighting duration as specified. Recharge time of the battery is 24 hours.

LAMP SELECTION	6V	12V	24V
Composite Tungsten	7.2, 9W	9, 12, 18W	9, 18 (25W, PAR36 only)
Quartz (Q)	12W	12, 20 (55W PAR36 only)	N/A
LED	5, 7W	2, 5, 7W	5, 7W
MR16	N/A	20, 35, 50W	N/A
TES	N/A	5, 9, 14, 30W	5, 9, 14, 30W
Sealed Beam LED (PAR36)	N/A	6W	6W

MODEL RATING GUIDE

MODEL	VOLTAGE (OUTPUT)	WATTAGE RATING 30MIN
AQ 6-36	6	36
AQ 6-50	6	50
AQ 6-80	6	80
AQ 12-36	12	36
AQ 12-50	12	50
AQ 12-72	12	72
AQ 12-90	12	90
*AQ 12-120	12	120
*AQ 12-150	12	150
*AQ 24-144	24	144

* Single face only

ORDERING GUIDE

SERIES	CAPACITY	LIGHT SOURCE	LETTER COLOUR	FACE#	CHEVRONS	1 MOUNTING	HEADS	OPTIONS
AQ-E (Exit) AQ-S (Sortie)	See model rating guide	L (LED)	R (Red)	1 (Single) 2 (Double)	U (Field adjustable)	W (Wall mount no canopy) C (Ceiling mount factory installed) E (End mount factory installed)	0 (None) 1SEA (one MR16 head) 2SEA (two MR16 heads) 1TESSQ (One head, HO) 2TESSQ (Two heads, HO) 1LRWP (One head) 2LRWP (Two heads)	² TD (10 min. time delay) WG (Wireguard) SW (Special wording-specify) ² IH (Internal heater) SM (Side mount heads) AT (Auto-test) PK (Pendant kit) ³ 2CK (Dual circuit)

NOTES: ¹Mounting must be specified; ²AC Voltage must be specified; ³With 120VAC only