




BRUNO RM

Universal Edge-Lit Running Man

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Universal surface or recessed, wall or ceiling end mounting
- Thin profile
- Edge-lit LED technology
- CSA 22.2 No. 141-15 Performance Certified

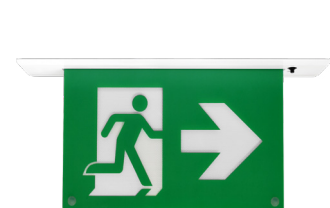

Recessed Mount



Wall Mount

UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



EXTERNAL SPECIFICATIONS

The BRUNO RM housing is constructed from durable die-cast aluminum. The acrylic faceplate is universal and can be configured for both single face or double face. The BRUNO allows the installer to choose between surface or recessed, wall, ceiling or end mounting. The housing comes in a white, baked powder coat finish. Available in custom powder coat finishes or alternate metal finishes (please specify). External LED monitor light and test switch are standard on self-powered versions.

INTERNAL SPECIFICATIONS

AC ONLY, AC/DC and SELF-POWERED comes standard configured with high-output LED technology, 120/347VAC input (optional 120/277V). Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger & transfer. Standard with 120/347VAC input and consumes only 2W nominal power. BRUNO signs configured for AC/DC operation feature a universal 2 wire DC input; 6VDC - 24VDC. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BELUCE AUTO-TEST (AT)

The BeLuce auto-test system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability.

ORDERING GUIDE

BRU-RM - - - - -

SERIES	OPERATION	LIGHT SOURCE	FACE#	PICTOGRAMME	MOUNTING	OPTIONS
BRU-RM	Blank (AC only) SP (Self-powered)	L (LED)	¹ U (Universal) 1 (Single) 2 (Double)	OLR (Universal Pictogramme) O (No Indicators) L (Left Indicator) R (Right Indicator) D (Down Indicator) U (Up Indicator) UR (45° Up Right) DR (45° Down Right) UL (45° Up Left) DL (45° Down Left)	M (Universal) S (Surface) R (Recessed)	BA (Brushed aluminum finish) PA (Polished aluminum finish) AT (Auto-test, SP only) PK12 (12" pendant kit) UDC (Universal 6 - 24VDC) 90SP (90 min. emergency) 120SP (120 min. emergency) ² FL (Visual alarm) ³ 120VDC (Specify 2 or 4 wires) IF(Inverted face) CC (Custom colour - specify)


NOTE ¹Order OLR or 2 pictograms; ²Visual alarm only with AT option; ³With 120 VAC only



BRUNO RM

Universal Edge-Lit Running Man

DIMENSIONS

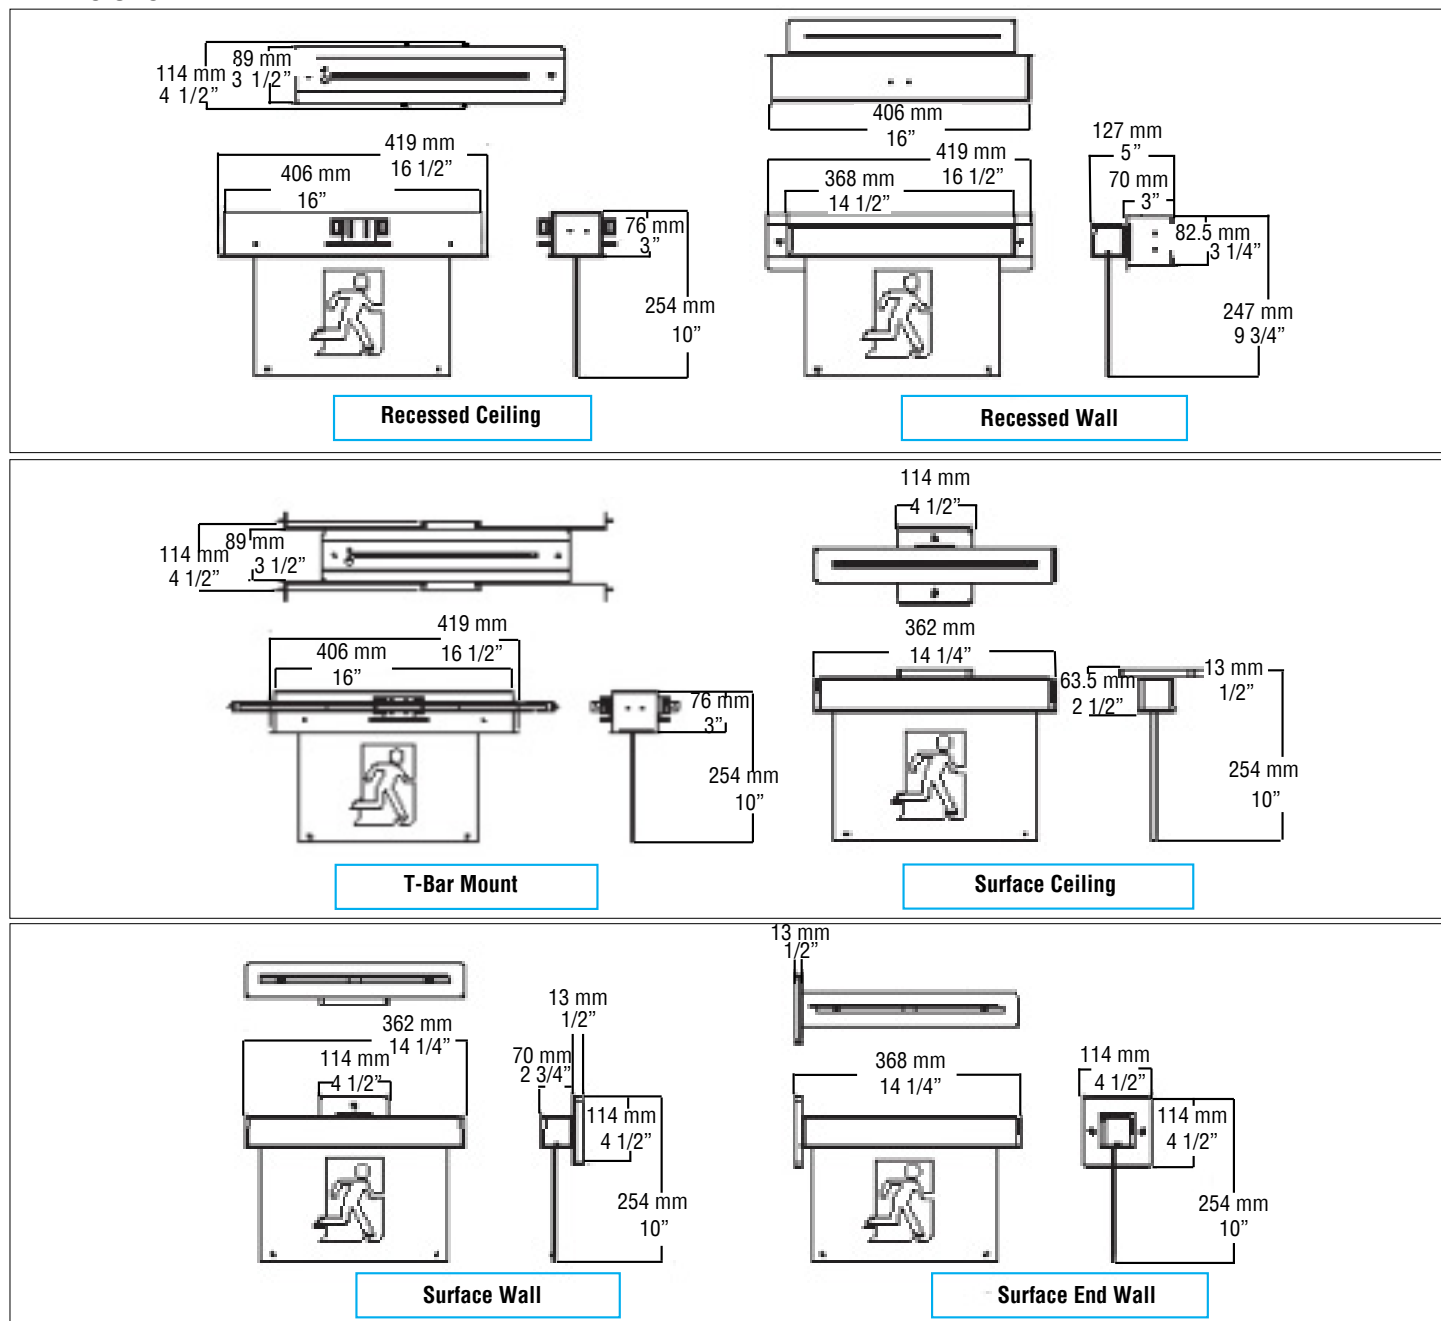

PRE-BUILT INVENTORY

ORDERING CODE	SHORT DESCRIPTION	LONG DESCRIPTION
10005618	BRU-RMLU-OLR-M-120347V	BRUNO UNIVERSAL EDGELIT RUNNING MAN AC ONLY WHITE LED UNIVERSAL FACE OLR PICTOGRAMS UNIVERSAL MOUNT WHITE FINISH 120347V INPUT
10005616	BRU-RMLU-OLR-M-120347V-UDC	BRUNO UNIVERSAL EDGELIT RUNNING MAN UNIVERSAL DC WHITE LED UNIVERSAL FACE OLR PICTOGRAMS UNIVERSAL MOUNT WHITE FINISH 120347V INPUT
10005611	BRU-RMSPLU-OLR-M-120347V	BRUNO UNIVERSAL EDGELIT RUNNING MAN SELF POWERED WHITE LED UNIVESAL FACE OLR PICTOGRAMS UNIVERSAL MOUNT WHITE FINISH 120347V INPUT