

Ecco Luna Remote

Halogen Remote



Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Corrosion, flame
resistant thermoplastic

Vandal resistant latch clips

Up to 2 x 12W
quartz lamps

UV stabilized diffuser

Fully enclosed lamp heads
eliminate any unwanted
tampering or re-positioning

Optional custom colour - Standard in White.




HIGH-OUTPUT DESIGN

The **ECCO LUNA** incorporates an efficient and high-output lens and reflector. Vacuum vaporization technology is used in the manufacturing of the reflector, resulting in a high-efficiency, mirror-like reflector. The diffusion lens has been designed to effectively transmit the greatest amount of light with the least transmittal loss.

CSA 22.2 No. 141 performance certified.

IP65/ WET LOCATION GASKETING

The **ECCO LUNA** carries an IP65 / wet location rating due to the advanced liquid silicon gasketing that completely seals the unit from moisture infiltration. Emergency units are especially vulnerable to fire sprinkler activation since these units are often installed right next to sprinkler heads. The IP65 / wet location rating ensures protection not just from ambient moisture but also from jets of water like those given off by broken or activated sprinkler heads.

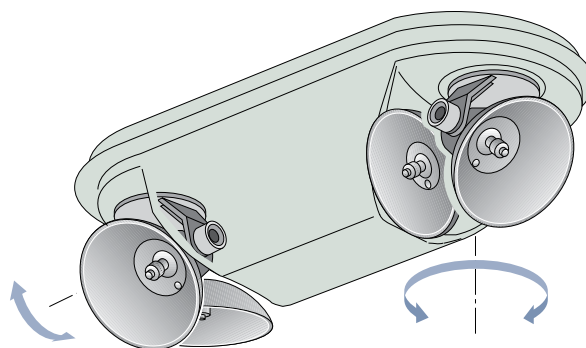

Lamp assemblies can be rotated, aimed and locked on two [2] axis for the ultimate in flexibility and ease of use.

SANITATION LISTED (SL)

Equivalent to the NSF standard 2, the **ECCO LUNA** is suitable for use in food equipment environments.

ORDERING INFORMATION

Series	Lamps	Voltage	Options
RLA	205 (2 x 5W halogen bi-pin)	6V, 12V, 24V	CC (Custom colour)
	208 (2 x 8W halogen bi-pin)	6V, 12V, 24V	WG (Wireguard)
	210 (2 x 10W halogen bi-pin)	6V, 12V	
	212 (2 x 12W halogen bi-pin)	6V, 12V, 24V	

REMOTES