



FORMA RM


Die-cast Aluminum Running Man

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Wall, ceiling or end mounting
- High-output LED technology
- Die-cast aluminum housing
- AC Only, Self-Powered or Universal DC
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

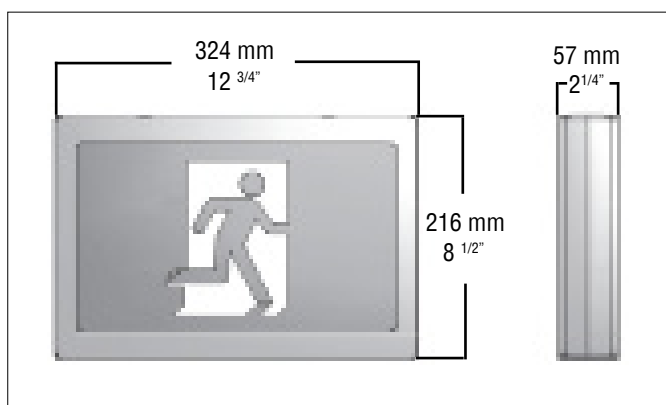

EXTERNAL SPECIFICATIONS

The FORMA is constructed from durable die-cast aluminum. The FORMA comes standard with a brushed aluminum face plate(s) and black housing. Available in custom poxy-based powdercoat finishes (please specify). Universal mounting pattern is stamped into the back plate. The self-powered LED version comes standard with an external LED status indicator and test switch.

INTERNAL SPECIFICATIONS

AC ONLY, AC/DC and SELF-POWERED comes standard configured with high-output LED technology and 120/347VAC input. Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger & transfer.

UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



ORDERING GUIDE

FM-RM - - - - -

SERIES	OPERATION	LIGHT SOURCE	FACE#	PICTOGRAM	MOUNTING	OPTIONS
FM-RM	Blank (AC only) SP (Self-powered)	L (LED)	1 (Single) ¹ 2 (Double) ² U (Universal)	OLR (Universal pictograms) 0 (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	W (Wall mount, no canopy) M (Universal mount, wall, ceiling or end)	WW (White face, white body) BB (Black face, black body) CC (custom colour - specify) BA (Brushed aluminum body) AT (Auto-test, SP only) WG (Wireguard) TP (Tamper proof screws) PK12 (12" pendant kit) UDC (6 - 24VDC) 90SP (90 minute emergency) 120SP (120 minute emergency) DL (Damp Location) SW-OL (RM no indicator, left)

NOTE: ¹Two pictograms or OLR must be ordered - specify; ²Specify OLR pictogram

PRE-BUILT INVENTORY

ORDERING CODE	SHORT DESCRIPTION	LONG DESCRIPTION
10701074	FM-RMLU-OLR-M-UDC-BA	FORMA DIECAST RUNNING MAN UNIVERSAL PICTOGRAMS UNIVERSAL DC WHITE LED UNIVERSAL FACE UNIVERSAL MOUNT BRUSHED ALUMINUM BODY BRUSHED ALUMINUM FACEPLATE 120/347V INPUT