



FORTE RM


Vandal Resistant Running Man

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- AC Only, Self-Powered or Universal DC
- Tamper proof screws for added protection
- Durable 16 gauge steel housing (14 ga. optional)
- Vandal resistant polycarbonate faceplate
- Surface wall, ceiling or end mounting
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

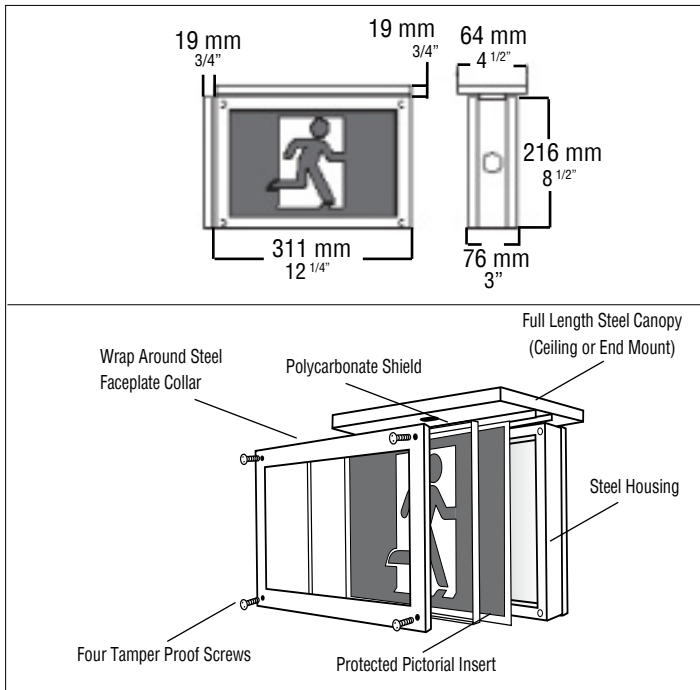

EXTERNAL SPECIFICATIONS

The FORTE is constructed from heavy duty steel. Sign face(s) are 16 gauge steel wrap-around collars backed with impact resistant polycarbonate. Tamper resistant screws are standard. The FORTE comes standard with a white baked powder coat finish. Available in custom epoxy-based powder coat finishes (please specify). Single or double face versions must be specified. The self-powered version comes standard with an external LED status indicator and test switch. The faceplate is backed with the polycarbonate plate.

INTERNAL SPECIFICATIONS

AC ONLY: Standard 120/347VAC input
SELF-POWERED: Standard self-powered versions use sealed nickel-cadmium batteries to provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger and transfer. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

The FORTE-SP is designed with a maintenance free, sealed nickel-cadmium battery providing a minimum emergency duration of 30 minutes. An optional 90 or 120 minute nickel-cadmium battery is available. Recharge time of the battery is 24 hours.

UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



ORDERING GUIDE

FR-RM - - - - -

SERIES	OPERATION	LIGHT SOURCE	FACE#	PICTOGRAM	² MOUNTING	OPTIONS
FR-RM	Blank (AC only) SP (Self-powered)	L (LED)	1 (Single) 2 (Double)	OLR (Universal pictograms) 0 (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	W (Wall mount no canopy) C (Ceiling mount factory installed) E (End mount factory installed)	CC (Custom colour - specify) WG (Wireguard) AT (Auto-test, SP only) PK12 (12" pendant kit) UDC (Universal 6 - 24VDC) 14G (14 gauge steel frame) 90SP (90 min. emergency) 120SP (120 min. emergency) ³ 120VDC (Specify 2 or 4 wires) ⁴ FAI (Fire alarm interface - specify) SW-OL (RM no indicator, left)

NOTE: ¹Two pictograms or OLR must be ordered - specify; ²Mounting must be specified the FORTE is not a universal product; ³With 120VAC only; ⁴Specify open/closed/6-24VAC