



FORTEZZA™ EXIT

Wet Location IP66 & Vandal Resistant Exit

Project Name: _____

Model Number: _____


Prepared By: _____

Date: _____

FEATURES & BENEFITS

- AC Only, Self-Powered or Universal DC
- UV resistant polycarbonate faceplate
- Vandal resistant to withstand extreme abuse
- Heavy gauge die-cast aluminum housing
- Surface wall, ceiling or end mounting
- AC only and UDC Signs: -20 to +40°C
- Self-powered Sign: +10 to +40°C (With heater option added: -20 to +40°C)
- Salt Spray Passed
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

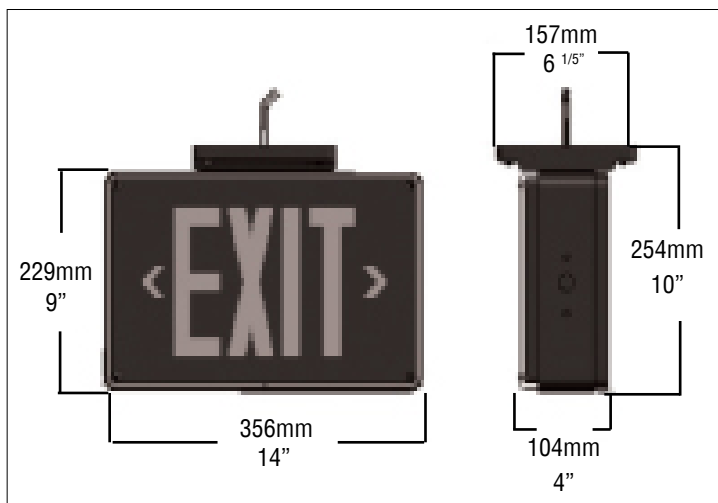

EXTERNAL SPECIFICATIONS

The FORTEZZA™ is constructed from .420" thick, heavy duty cast aluminum. The faceplates are protected by high abuse clear polycarbonate, which is recessed into the housing. Tamper resistant screws are standard. The FORTEZZA™ comes standard black although colour options are available upon request. Single or double versions must be specified. The self-powered version comes standard with an external LED status indicator and test switch.

INTERNAL SPECIFICATIONS

AC ONLY: STANDARD 120/347VAC or 120/277VAC input.
SELF-POWERED: standard self powered versions use sealed nickel-cadmium batteries to provide a minimum of 30 minutes of emergency duration. Optional 120 minute duration batteries are available. An internal heater with thermostat is optional for low temperature installations. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

Designed with a maintenance free, sealed nickel-cadmium battery providing a minimum emergency duration of 30 minutes. Optional 120 minute nickel-cadmium batteries are available. Recharge time of the battery is 24 hours.

ORDERING GUIDE

FTZ - - - - -

SERIES	MODEL	LED	FACE#	² MOUNTING	VOLTAGE	OPTIONS
FTZ	HT (AC only) SP (Self-powered)	LR (Red) ⁵ LG (Green)	1 (Single) 2 (Double)	U (Universal mount - std.) W (Wall - no canopy) C (Ceiling - factory installed) E (End - factory installed)	120/347V 120/277V	BB (Black face, black body) WW (White face, white body) ¹ IH (Internal heater 120, 277 or 347V) ⁴ 120VDC (Specify 2 or 4 wires) SW (Special wording - specify) PK (Pendant Kit) 120SP (120 minute emergency) ⁴ 2CK (Dual circuit) UDC (6 - 24VDC) ³ FAI (Flash on fire alarm-specify) AT (Auto-test, SP only)

NOTES: ¹Available for SP models only; ²Mounting must be specified as the canopy is factory installed; ³Specify open/closed/6-24 VAC; ⁴With 120VAC only; ⁵Can only be used with special wording signage.



FORTEZZA™ EXIT

Wet Location IP66 & Vandal Resistant Exit

PRE-BUILT INVENTORY

ORDERING CODE	SHORT DESCRIPTION	LONG DESCRIPTION
10110004	FTZHTLR1UWW-120277V	FORTEZZA DIE CAST HEAVY DUTY WET LOCATION EXIT AC ONLY RED LED SINGLE FACE UNIVERSAL MOUNT ALL WHITE FINISH 120277V INPUT
10110048	FTZHTLR2UWW-120277V	FORTEZZA DIE CAST HEAVY DUTY WET LOCATION EXIT AC ONLY RED LED DOUBLE FACE UNIVERSAL MOUNT ALL WHITE FINISH 120277V INPUT
10110009	FTZSALR1UWW-120277V	FORTEZZA DIE CAST HEAVY DUTY WET LOCATION AUTOTEST EXIT SELF POWERED RED LED SINGLE FACE UNIVERSAL MOUNT ALL WHITE FINISH 120277V INPUT
10110037	FTZSALRUUWW-120277V	FORTEZZA DIE CAST HEAVY DUTY WET LOCATION AUTOTEST EXIT SELF POWERED RED LED UNIVERSAL FACE UNIVERSAL MOUNT ALL WHITE FINISH 120277V INPUT