



GUIDA B6L

Recessed Bilingual Edge-Lit (Steel)

Project Name: _____ Model Number: _____
 Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Surface or recessed, wall or ceiling mounting
- Field removable chevrons
- High-output LED technology
- AC Only, Self-Powered or Universal DC
- White, clear or mirrored face
- CSA 22.2 No. 141-15 Performance Certified

INTERNAL SPECIFICATIONS

AC ONLY, AC/DC, SELF-POWERED: comes standard configured with high-output LED technology, 120/347VAC input. Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger & transfer. GUIDA-B6L bilingual signs configured for AC/DC operation feature a universal 2 wire DC input; 6VDC - 24VDC. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.


EXTERNAL SPECIFICATIONS

The GUIDA-B6L housing backbox is constructed from durable 20 gauge steel. The acrylic faceplate is available in both single face or double face versions, with a clear, white or mirrored background (please specify). Recessed versions are supplied standard with a white, baked powder coat steel trim plate. Available in custom epoxy-based powder coat finishes or alternate metal finishes (please specify). External LED monitor light and test switch are standard on self-powered versions.

BATTERY TECHNOLOGY

Designed with a maintenance free, nickel-cadmium battery providing a minimum emergency duration of 30 minutes. An optional 90 or 120 minute nickel-cadmium battery is available. Recharge time of the battery is 24 hours.

DIMENSIONS

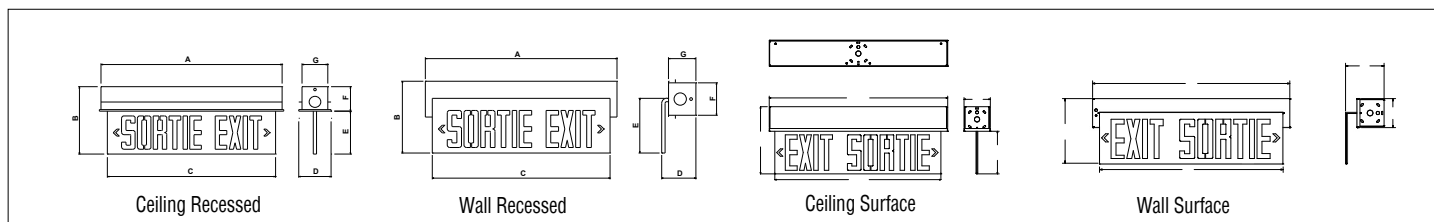

MODEL	A	B	C	D	E	F	G
Rec. Ceiling	30" (762mm)	12" (305mm)	28" (711mm)	5" (127mm)	7" (178mm)	4" (102mm)	4" (102mm)
Rec. Wall	30" (762mm)	10 1/2" (267mm)	28" (711mm)	4 1/2" (114mm)	8" (203mm)	5" (127mm)	4" (102mm)
Surf. Ceiling	30" (762mm)	11 1/4" (286mm)	28" (711mm)	7 1/4" (184mm)	4 1/2" (114mm)		
Surf. Wall	30" (762mm)	10" (254mm)	28" (711mm)	6" (152mm)	4 1/2" (114mm)		

ORDERING GUIDE

SERIES	OPERATION	LIGHT SOURCE	MOUNTING	LETTER COLOUR	FACE	CHEVRONS	OPTIONS
GD-B6L-ES (Exit/Sortie)	Blank (AC only)	L (LED)	RC (Recessed Ceiling)	ROC (Red on clear - single face only)	1 (Single)	U(Field adjustable)	CC (Custom colour - specify)
GD-B6L-SE (Sortie/Exit)	SP (Self-powered)		RW (Recessed wall)	ROW (Red on white)	2 (Double)		BA (Brushed aluminum finish)
			SC (Surface ceiling)	ROM (Red on mirror)			SW (Special wording - specify)
			SW (Surface wall)				PK12 (12" pendant kit)
			SE (Surface end wall)				UDC (Universal 6 - 24VDC)
							90SP (90 min. emergency)
							120SP (120 min. emergency)

NOTE: *For surface mount application contact factory for availability