

EXIT

GUIDA EXIT PLUS

Surface/Recessed Thin Line Edge-Lit

Project Name: _____

Model Number: _____

Prepared By: _____

Date: _____

FEATURES & BENEFITS

- Surface or recessed, wall or ceiling mounting
- Thin-line profile
- Edge-Lit LED technology
- AC Only, Self-Powered or Universal DC
- White, clear or mirrored face
- Elegant curved face
- CSA 22.2 No. 141-15 Performance Certified


BATTERY TECHNOLOGY

Designed with a maintenance free, nickel-cadmium battery providing a minimum emergency duration of 30 minutes. An optional 90 or 120 minute nickel-cadmium battery is available. Recharge time of the battery is less than 24 hours.

BELUCE AUTO-TEST (AT)

The system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability.

DIMENSIONS

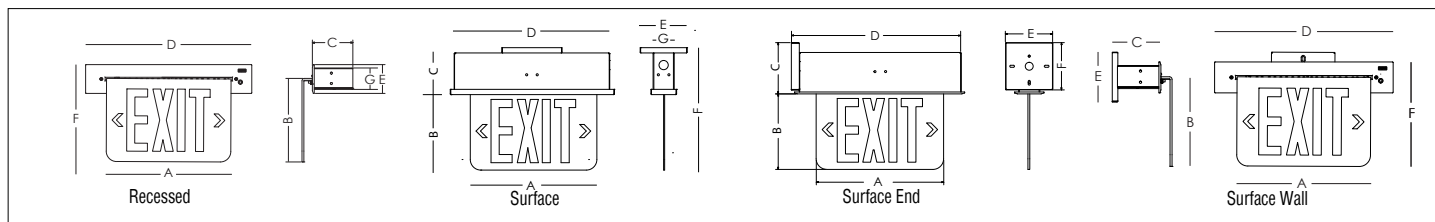

MODEL	A	B	C	D	E	F	G
Recessed	12" (305mm)	8" (203mm)	4" (102mm)	16" (406mm)	2 3/4" (70mm)	9 1/4" (235mm)	2" (51mm)
Surface	12" (305mm)	7 1/4" (184mm)	4" (102mm)	15 1/2" (394mm)	4 1/4" (108mm)	11 1/2" (292mm)	2" (51mm)
Surface End	12" (305mm)	7 1/4" (184mm)	4 3/4" (121mm)	16 1/4" (413mm)	4 1/2" (114mm)	4 1/2" (114mm)	
Surface Wall	12" (305mm)	8" (203mm)	4 1/4" (108mm)	16" (406mm)	4 1/2" (114mm)	9 1/4" (235mm)	

ORDERING GUIDE

GD-E - - - - -

SERIES	OPERATION	LIGHT SOURCE	MOUNTING	LETTER COLOUR	FACE#	CHEVRONS	STYLE	OPTIONS
GD-E (Exit)	Blank (AC only) SP (Self-powered)	L (LED)	RC (Recessed Ceiling) RW (Recessed wall) SC (Surface ceiling) SW (Surface wall) SE (Surface end)	ROC (Red on clear - single face only) ROW (Red on white) ROM (Red on mirror)	1 (Single) 2 (Double)	U (Field adjustable)	Plus	CC-S (Custom colour trim, sheet aluminum-specify) CC-D (Custom colour trim, die-cast - specify) BA (Die-cast trim brushed aluminum finish) PK12 (12" pendant kit) SW (Special wording - specify) AT (Auto-test, SP only) UDC (Universal 6 - 24VDC) 90SP (90 min. emergency) 120SP (120 min. emergency) FL (Visual alarm) IF (Inverted face) *120VDC (Specify 2 or 4 wires)

NOTE: *With 120VAC only