



GUIDA RM

Surface/Recessed Edge-Lit Running Man

Project Name: _____

Model Number: _____


Prepared By: _____

Date: _____

FEATURES & BENEFITS

- Edge-lit LED technology
- Surface or recessed, wall or ceiling mounting, surface end mount
- AC Only, Self-Powered or Universal DC
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

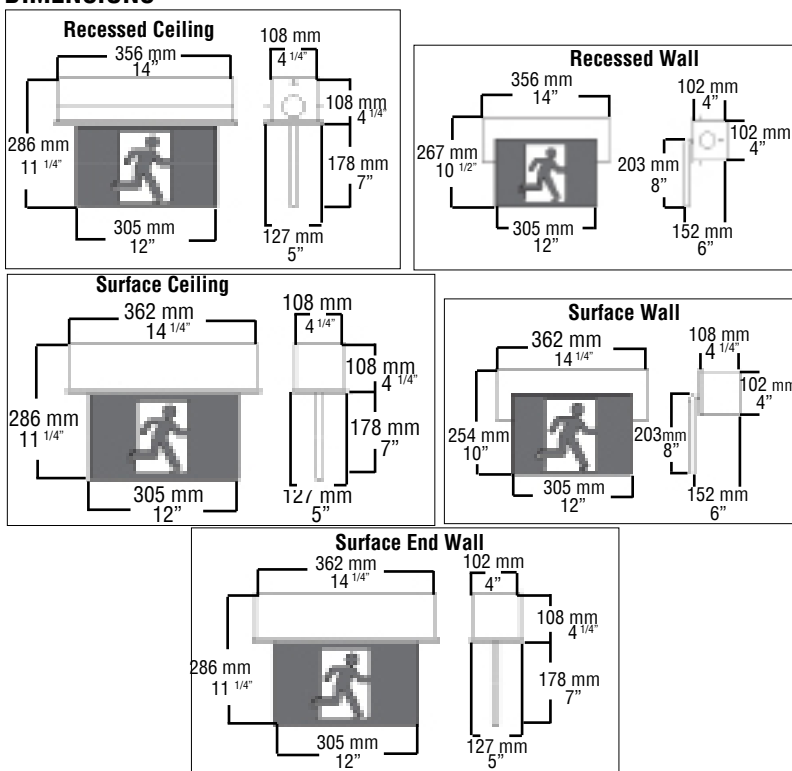

ELECTRICAL SPECIFICATIONS

If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

ORDERING GUIDE

GD-RM - - - - -

SERIES	OPERATION	LIGHT SOURCE	MOUNTING	FACE#	² PICTOGRAM	OPTIONS
GD-RM	Blank (AC only) SP (Self-powered)	L (LED)	RC (Recessed ceiling) SC (Surface ceiling) SW (Surface wall) SE (Surface end wall) RW (Recessed wall)	1 (Single) 2 (Double)	OLR (Universal pictograms) 0 (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	CC (custom colour - specify) BA (Brushed aluminum body) SW-OL (RM no indicator, left) PK12 (12" pendant kit) UDC (Universal 6 - 24VDC) 90SP (90 min. emergency) 120SP (120 min. emergency) AT (Auto-test, SP only) ³ 120VDC (Specify 2 or 4 wires) MM (Mullion mount) IF (Inverted face)

NOTE: ¹Two pictograms or OLR must be ordered - specify; ²For a pictogram and "EXIT" or "SORTIE" text add "-E" or "-S" after the pictogram nomenclature; ³With 120VAC only

EXTERNAL SPECIFICATIONS

The GUIDA housing backbox is constructed from durable 20gauge steel. The acrylic face plate is available in both single face or double face versions. Recessed versions are supplied standard with a white, baked powder coat steel trim plate. Available in custom epoxy-based powder coat finishes or alternate metal finishes (please specify). External LED monitor light and test switch are standard on self-powered versions.

INTERNAL SPECIFICATIONS

AC ONLY, AC/DC and SELF-POWERED comes standard configured with high-output LED technology, 120/347VAC input. Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger & transfer. GUIDA signs configured for AC/DC operation feature a universal 2 wire DC input; 6VDC - 24VDC.

SUPPLEMENTAL TEXT

AC ONLY, AC/DC and SELF-POWERED comes standard configured with high-output LED technology, 120/347VAC input. Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger & transfer. GUIDA signs configured for AC/DC operation feature a universal 2 wire DC input; 6VDC - 24VDC.

UNIVERSAL PICTOGRAMS

The OLR (Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.

BELUCE AUTO-TEST (AT)

The BeLuce auto-test system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability.



GUIDA RM

Surface/Recessed Edge-lit Running Man

PRE-BUILT INVENTORY

ORDERING CODE	SHORT DESCRIPTION	LONG DESCRIPTION
10400412	GD-RMLRC2-OLR-120347V	GUIDA EDGELIT RUNNING MAN AC ONLY WHITE LED RECESSED CEILING MOUNT DOUBLE FACE UNIVERSAL PICTOGRAMS WHITE FINISH 120347V INPUT
10400414	GD-RMSPLRC2-OLR-120347V	GUIDA EDGELIT RUNNING MAN SELF POWERED WHITE LED RECESSED CEILING MOUNT UNIVERSAL PICTOGRAMS DOUBLE FACE WHITE FINISH 120347V INPUT
10400374	GD-RMSPLRC1-OLR-120347V	GUIDA EDGELIT RUNNING MAN SELF POWERED WHITE LED RECESSED CEILING MOUNT UNIVERSAL PICTOGRAMS SINGLE FACE WHITE FINISH 120347V INPUT
10400439	GD-RMSPLSW1-OLR-120347V	GUIDA EDGELIT RUNNING MAN SELF POWERED WHITE LED SURFACE WALL MOUNT UNIVERSAL PICTOGRAMS SINGLE FACE WHITE FINISH 120347V INPUT
10400468	GD-RMLRC2-OLR-120347V-UDC	GUIDA EDGELIT RUNNING MAN UNIVERSAL DC WHITE LED RECESSED CEILING MOUNT DOUBLE FACE UNIVERSAL PICTOGRAMS WHITE FINISH 120347V INPUT
10400467	GD-RMLRC1-OLR-120347V-UDC	GUIDA EDGELIT RUNNING MAN UNIVERSAL DC WHITE LED RECESSED CEILING MOUNT SINGLE FACE UNIVERSAL PICTOGRAMS WHITE FINISH 120347V INPUT
10400541	GD-RMLSC2-OLR-120347-UDC	GUIDA EDGELIT RUNNING MAN UNIVERSAL DC WHITE LED SURFACE CEILING MOUNT DOUBLE FACE UNIVERSAL PICTOGRAMS WHITE FINISH 120347V INPUT
10400522	GD-RMLSC1-OLR-120347V-UDC	GUIDA EDGELIT RUNNING MAN UNIVERSAL DC WHITE LED SURFACE CEILING MOUNT SINGLE FACE UNIVERSAL PICTOGRAMS WHITE FINISH 120347V INPUT
10400523	GD-RMLSW1-OLR-120347V-UDC	GUIDA EDGELIT RUNNING MAN UNIVERSAL DC WHITE LED SURFACE WALL MOUNT SINGLE FACE UNIVERSAL PICTOGRAMS WHITE FINISH 120347V INPUT