



PROTEGGA RM

NEMA 4 & 4X Running Man



Project Name: _____

Model Number: _____


Prepared By: _____

Date: _____

FEATURES & BENEFITS

- AC Only, Self-Powered or Universal DC
- Tamper proof screws for added protection
- Durable 16 gauge steel housing (14 ga. optional)
- Vandal resistant polycarbonate faceplate
- Surface wall, ceiling or end mounting
- AC only and UDC Signs: -20 to +40°C
- Self-powered Sign: +10 to +40°C
- Solid state transfer technology
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

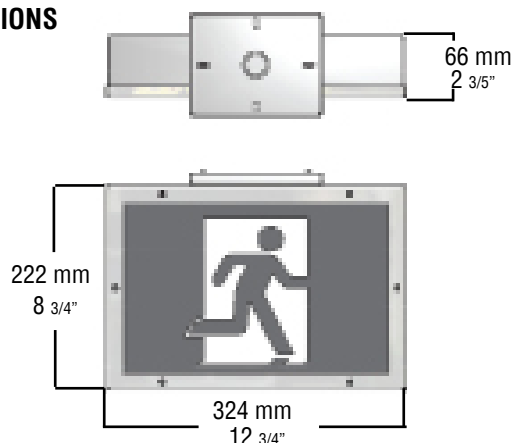

SUPPLEMENTAL TEXT

A running man sign with supplementary "EXIT" or "SORTIE" text is also available in the PROTEGGA model. To designate "EXIT" add "-E" to the end of the pictogram nomenclature, for "SORTIE" add "-S". For example, a sign with supplementary "EXIT" text and the indicator down to the right would have "DR-E" as its pictogram nomenclature.

ORDERING GUIDE

PTG-RM-

SERIES	OPERATION	LIGHT SOURCE	FACE#	1 PICTOGRAM	2 MOUNTING	VOLTAGE	OPTIONS
PTG-RM	HT (AC only) SP (Self-powered)	L (LED)	1 (Single) 2 (Double)	0LR (Universal pictograms) 0 (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	W (Wall mount no canopy) C (Ceiling mount factory installed) E (End mount factory installed)	120/347V 120/277V	UDC (6 - 24VDC) TP (Tamper proof screws) 90SP (90 minute emergency) 120SP (120 minute emergency) 4120VDC (Specify 2 or 4 wires) 5FAI (Flash on fire alarm signal) AT (Auto-test, SP only) SW-0L (RM no indicator, left)

NOTE: ¹Two pictograms or 0LR must be ordered - specify; ²Mounting must be specified; ³For a pictogram and "EXIT" or "SORTIE" text add "-E" or "-S" after the pictogram; ⁴With 120VAC only; ⁵Specify open/closed/6-24 VAC



BeLuce Canada Inc., 3900 14th Avenue, Unit 1, Markham, ON L3R 4R3 P: (905) 948-9500 F: (905) 948-8673 www.beghellicanada.com

EXTERNAL SPECIFICATIONS

The PROTEGGA housing is constructed from durable aluminum. The housing is fully gasketed for wet location applications and is supplied standard in a white finish. Wall, ceiling or end mounting configurations are available and must be specified. Single or double face versions must be specified. The self-powered version comes standard with an external LED status indicator and test switch.

INTERNAL SPECIFICATIONS

AC ONLY: standard 120/347VAC or 120/277VAC input
SELF-POWERED: Standard self-powered versions use sealed nickel-cadmium batteries to provide a minimum 30 minutes of emergency duration. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

Designed with a maintenance free, sealed nickel-cadmium battery providing a minimum emergency duration of 30 minutes. An optional 90 or 120 minute nickel-cadmium battery is available. Recharge time of the battery is 24 hours.

UNIVERSAL PICTOGRAMS

The 0LR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.

