



PLURALUCE® SURFACE REMOTE

Compact 12-24V surface mounted LED remote

Project Name: _____ Model Number: _____
Prepared By: _____ Date: _____


FEATURES & BENEFITS

- Up to 55' spacing on centre
- Aluminum cover
- 3 interchangeable lenses for symmetric or asymmetric ceiling or wall distribution
- 4 x 2.5W LEDs 4,000K
- Housing design acts as a large heat sink ensuring efficient thermal management and long operating life of the LEDs.
- CSA 22.2 No. 141-15 Performance Certified

LENSES

The PLURALUCE® surface is supplied with 3 lenses for a choice of distribution patterns. These custom designed lenses are constructed of optical grade polycarbonate. The symmetrical ceiling distribution is suitable for use in open areas with spacing of up to 28' on centre. The asymmetrical ceiling distribution is designed for use in hallways and corridors with spacing of up to 55' on centre. The asymmetrical wall distribution provides 35' on centre with a 6' wide path of egress.

DIMENSIONS

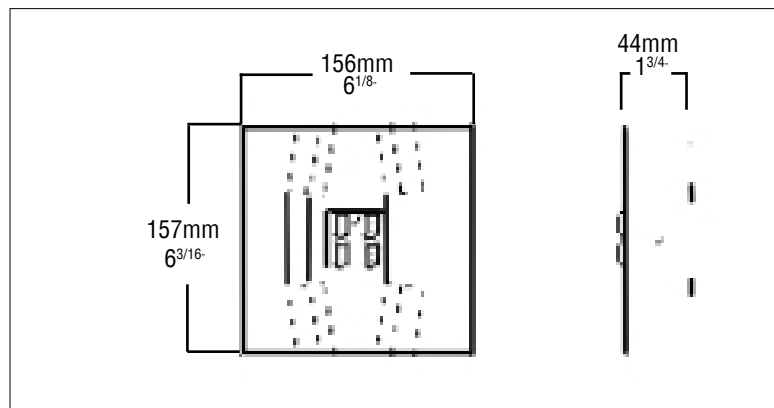

ORDERING GUIDE

PL-RMT

-

SERIES	OPTIONS
PL-RMT	BA (Brushed aluminum housing) CC (Custom coloured housing) TP (Tamper proof screw) WG (Wireguard)