



PROTEGGA B6L

Bilingual NEMA 4 & 4X

Project Name: _____

Model Number: _____


Prepared By: _____

Date: _____

FEATURES & BENEFITS

- NEMA 4 & 4X protection
- Also available Exit beside Sortie
- High clarity, clear polycarbonate faceplate
- Fully gasketed aluminum housing
- Sanitation listed for use in food preparation areas
- Surface wall, ceiling or end mounting
- AC only and UDC Signs: -20 to +40°C
- Self-powered Sign: +10 to +40°C
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

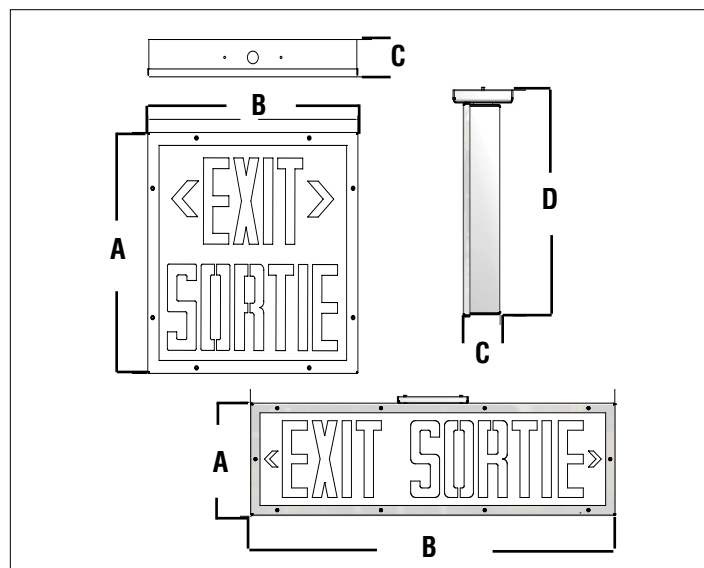

MODEL	A	B	C	D
PTG-B6L-EOS	426mm (16 3/4")	426mm (16 3/4")	66mm (2 3/5")	
PTG-B6L	222mm (8 3/4")	743mm (29 1/4")	69mm (2 7/10")	234mm (1/4")

ORDERING GUIDE

SERIES	OPERATION	LIGHT SOURCE	LETTER COLOUR	FACE#	¹ MOUNTING	CHEVRONS	VOLTAGE	OPTIONS
PTG-B6L-EOS (Exit over Sortie)	Blank (AC only)	L (LED)	R (Red)	1 (Single)	W (Wall mount no canopy)	U (Universal field removable)	120/347V	UDC (6 -24 Volt DC)
PTG-B6L (Exit/Sortie)	SP (Self-powered)			2 (Double)	C (Ceiling mount factory installed) E (End mount installed)		120/277V	TP (Tamper proof screws) 90SP (90 minute emergency) 120SP (120 minute emergency) SW (special wording - specify) LXN (Lexan shield)

NOTES: ¹ Mounting must be specified