



QUADRA COMBO RM


Extruded Aluminum Running Man Combo

Project Name: _____ Model Number: _____
Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Wall or ceiling mounting
- Up to 55W lamps
- High-output LED technology
- Up to 6V-50W or 12V-72W capacity
- Extruded aluminum housing
- AC Only, Self-Powered or Universal DC
- Operating temperature: +10°C to +40°C
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

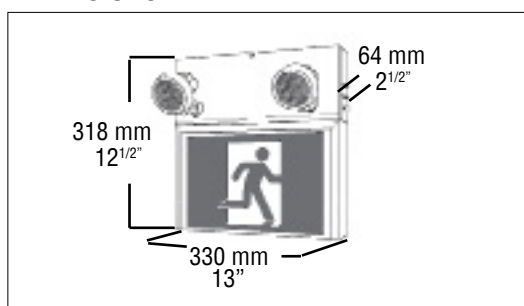

UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.

MODEL RATING GUIDE

MODEL	VOLTAGE (OUTPUT)	WATTAGE RATING 30MIN	WATTAGE RATING 120MIN
QR-RM-6-36	6	36	10
QR-RM-6-50	6	50	15
QR-RM-12-36	12	36	10
QR-RM-12-72	12	72	22

ORDERING GUIDE

QR-RM- - - - -

SERIES	WATTS	LIGHT SOURCE	FACE#	3 PICTOGRAM	MOUNTING	HEADS	LAMP	OPTIONS
QR-RM	6-36 6-50 12-36 12-72	L (LED)	1 (Single) 2 (Double) U (Universal)	OLR (Universal pictograms) O (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	W (Wall mount no canopy) M (Universal mount wall, ceiling or end)	0 (None) 1SR (One head) 2SR (Two heads) 1LR (One head) 2LR (Two heads) 1BTMR (One head) 2BTMR (Two heads)	See lamp selection	CC (Custom colour - specify) TD (10 min. time delay) WG (Wireguard) PK12 (12" pendant kit) AT (Auto-test) SM (Side mount heads) TP (Tamper proof screws) LXN (Lexan shield) SW-OL (RM no indicator, left)

NOTE: ¹Two pictograms or OLR must be ordered - specify; ²Specify OLR pictogram; ³For a pictogram and "EXIT" or "SORTIE" text add "-E" or "-S" after the pictogram nomenclature with 120VAC only; ⁴AC voltage must be specified

EXTERNAL SPECIFICATIONS

The QUADRA is constructed from durable extruded aluminum. The unit comes standard with a white baked powder coat finish. Available in custom epoxy-based powder coat finishes (please specify). Single, double or universal face versions must be specified. Universal mounting pattern and key hole slots are stamped into the backplate. The self-powered version comes standard with an external LED status indicator and test switch.

INTERNAL SPECIFICATIONS

AC ONLY, AC/DC and SELF-POWERED: comes standard configured with high-output LED technology and 120/347VAC input. Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger & transfer. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

Designed with a maintenance free, valve regulated sealed lead-acid battery providing emergency lighting duration as specified per unit. Recharge time of the battery is 24 hours.

SUPPLEMENTAL TEXT

A running man sign with supplementary "EXIT" or "SORTIE" text is also available in the QUADRA model. To designate "EXIT" add "-E" to the end of the pictogram nomenclature, for "SORTIE" add "-S". For example, a sign with supplementary "EXIT" text and the indicator down to the right would have "DR-E" as it's pictogram nomenclature.

LAMP SELECTION

	6V	12V	24V
Composite Tungsten	7.2, 9W	9, 12, 18W	9, 18 (25W, PAR36 only)
Quartz (Q)	12W	12, 20 (55W PAR36 only)	N/A
LED-MR16	5, 7W	2, 5, 7W	5, 7W
MR16	N/A	20, 35, 50W	N/A
LED Module	3/4W	3/4W	N/A
TES	N/A	5, 9, 14, 30W	5, 9, 14, 30W
Sealed beam (PAR36 only)	N/A	6W	6W

NOTE: MR16 max 12W in SR head