



QUADRALUCE RM


Extruded Aluminum Running Man LED Combo

Project Name: _____ Model Number: _____
Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Wall, ceiling or end mounting
- 3 lenses for different light distribution
- High-output LED technology with constant light output level
- Integrated test button & LED indicator
- 2-wire universal AC input of 120-347 VAC
- 4 x 2.5W LEDs 4000K
- Constructed of sturdy extruded aluminum
- Operating temperature: +10°C to +40°C
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

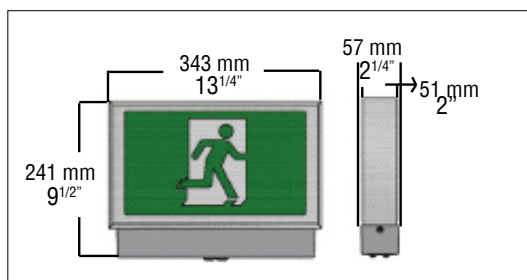

AC INPUT RATINGS

VOLTAGE (VAC)	WATTAGE (W)	RATED CURRENT (A)
120/277/347	6.0/6.5/8.6	0.15/0.075/0.10

ORDERING GUIDE


QR-RM-PL - - - - -

SERIES	VOLTS	LIGHT SOURCE	FACE#	PICTOGRAM	MOUNTING	OPTIONS
QR-RM-PL	12-10	L (LED)	1 (Single) 2 (Double) 2U (Universal)	OLR (Universal pictograms) O (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	W (Wall) C (Ceiling) M (Universal)	CC (Custom colour - specify) WG (Wireguard) PK12 (12" pendant) AT (Auto-test) TP (Tamper proof screws) SW-OL (RM no indicator, left) 90MIN (90 min. emergency) 120MIN (120 min. emergency)


NOTE: ¹Two pictograms or OLR must be specified; ² Specify OLR pictogram

LENS DISTRIBUTION PATTERNS


Ceiling Symmetrical

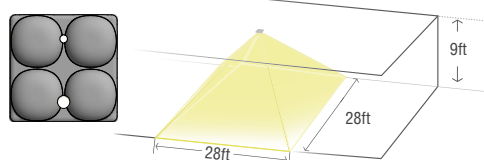

Wall Forward

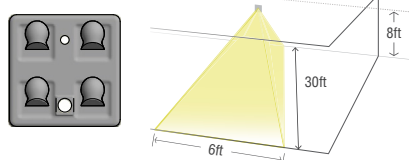

Wall Wide

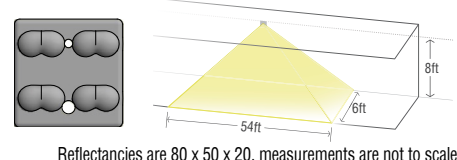

Reflectancies are 80 x 50 x 20, measurements are not to scale

LED TECHNOLOGY

The QUADRALUCE is illuminated with four 2.5W Samsung LEDs. The QUADRALUCE delivers up to 919 lumens. Each pair of LEDs are laid out in parallel on the LED module so if one pair fails, the other will remain illuminated. A high-efficiency LED driver is used to maintain a constant output current to all LEDs. The LEDs are rated for >54,000 hours at L80.

BATTERY TECHNOLOGY

The QUADRALUCE comes standard with a Ni-Cd battery pack that provides a minimum of 30 minute emergency duration. Optional 90 or 120 minute run time is available.

BELUCE AUTO-TEST (AT)

The system automatically performs one 5 minute discharge test monthly and every 6 months it performs two full discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability. A manual Test feature is included when the Auto-test option is selected. The manual test will run a 30 second, 15 minute or 90 minute test by pressing the correct sequence of the test switch.

UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.

