



STELLALUCE COMBO RM


Steel Running Man LED Combo

Project Name: _____ Model Number: _____
Prepared By: _____ Date: _____

FEATURES & BENEFITS

- Wall, ceiling or end mounting
- 3 lenses for different light distribution
- High-output LED technology with constant light output level
- Integrated test button & LED indicator
- 2-wire universal AC input of 120-347 VAC
- 4 x 2.5W LEDs 4000K
- 20 gauge steel with a die-cast aluminum combo housing
- Operating temperature: +10°C to +40°C
- CSA 22.2 No. 141-15 Performance Certified

DIMENSIONS

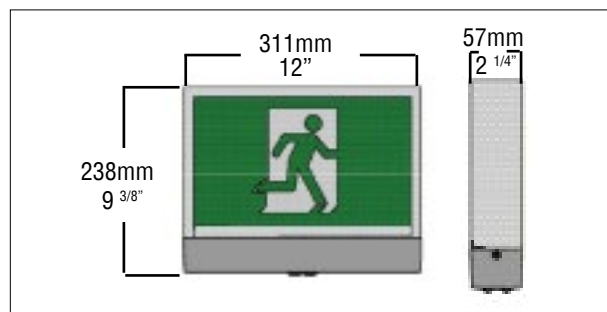

AC INPUT RATINGS

VOLTAGE (VAC)	WATTAGE (W)	RATED CURRENT (A)
120/277/347	6.0/6.5/8.6	0.15/0.075/0.10

ORDERING GUIDE



SL-RM-PL - - - - -

SERIES	WATTS	LIGHT SOURCE	FACE#	PICTOGRAM	MOUNTING	OPTIONS
SL-RM-PL	12-10	L (LED)	1 (Single) 12 (Double) 2U (Universal)	OLR (Universal pictograms) O (No indicators) L (Left indicator) R (Right indicator) D (Down indicator) U (Up indicator) UR (45° up right) DR (45° down right) UL (45° up left) DL (45° down left)	W (Wall) C (Ceiling) M (Universal mount)	CC (Custom colour - specify) WG (Wireguard) PK12 (12" pendant kit) AT (Auto-test) TP (Tamper proof screws) SW-OL (RM no indicator, left) 90MIN (90 min. run time) 120MIN (120 min. run time)


NOTE: *Two pictograms or OLR must be specified; *OLR pictograms will be provided

LENS DISTRIBUTION PATTERNS



Ceiling Symmetrical



Wall Forward



Wall Wide



Reflectancies are 80 x 50 x 20, measurements are not to scale

LED TECHNOLOGY

The STELLALUCE is illuminated with four 2.5W Samsung LEDs. The STELLALUCE delivers up to 919 lm. Each pair of LEDs are laid out in parallel on the LED module so if one pair fails, the other will remain illuminated. A high-efficiency LED driver is used to maintain a constant output current to all LEDs. The LEDs are rated for >54,000 hours at L80.

BATTERY TECHNOLOGY

The STELLALUCE comes standard with a Ni-Cd battery pack that provides a minimum of 30 minute emergency duration. Optional 90 or 120 minute run time is available.

BELUCE AUTO-TEST (AT)

The system automatically performs one 5 minute discharge test monthly and every 6 months it performs two full discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability. A manual Test feature is included when the Auto-test option is selected. The manual test will run a 30 second, 15 minute or 90 minute test by pressing the correct sequence of the test switch.

UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.





STELLALUCE COMBO RM

Steel Running Man LED Combo

PRE-BUILT INVENTORY

ORDERING CODE	SHORT DESCRIPTION	LONG DESCRIPTION
10206014	SL-RM-PL1210LU-0LR-M-120-347V	STELLALUCE RUNNING MAN COMBO 12V 10W FOR 30 MIN WHITE LED UNIVERSAL FACE UNIVERSAL MOUNT 1 10W LED 120277347V INPUT