



UNIKO RM

Die-cast Running Man

Project Name: _____

Model Number: _____

Prepared By: _____

Date: _____

FEATURES & BENEFITS

- Wall or pendant mounting
- Elegant curved frame
- Die-cast housing
- Mounts away from the wall to give the illusion of floating
- Thin profile
- Ideal for architectural applications
- CSA 22.2 No. 141-15 Performance Certified

INTERNAL SPECIFICATIONS

120/347VAC input is standard. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

The UNIKO-RM is designed with a lead acid battery providing a minimum emergency duration of 30 minutes. An optional 90 or 120 minute lead acid battery is available. Recharge time of the battery is less than 24 hours.

BELUCE AUTO-TEST (AT)


The system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability.

UNIVERSAL PICTOGRAMS

The OLR(Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



DIMENSIONS

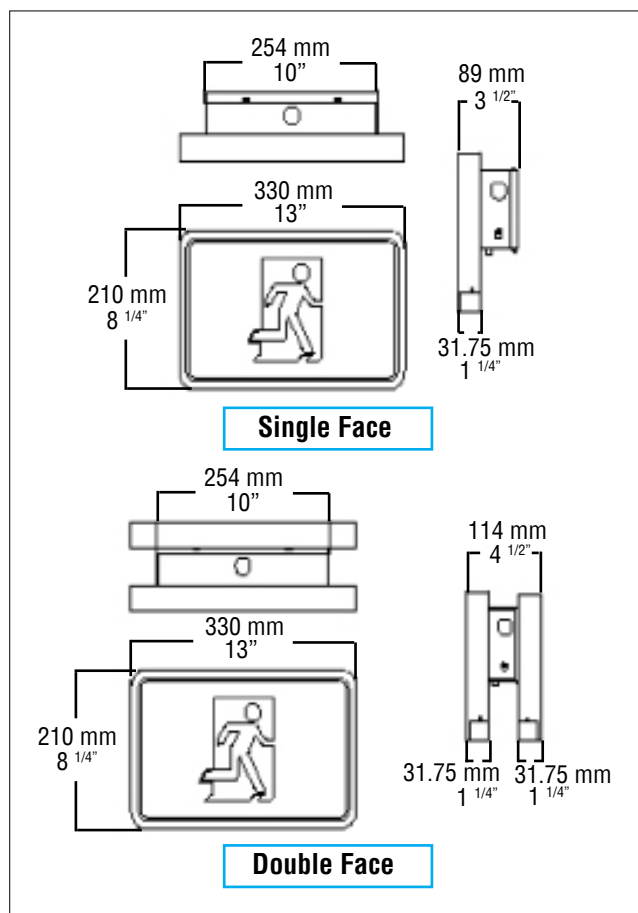

ORDERING GUIDE

UKO-RM - - - - -

SERIES	OPERATION	LIGHT SOURCE	FACE#	PICTOGRAM	OPTIONS
UKO-RM	Blank (AC only) SP (Self-powered)	L (LED)	1 (single) 12 (double)	OLR(pictogrammes universels) O (sans indicateur) L (indicateur à gauche) R (indicateur à droite) D (indicateur en bas) U (indicateur en haut) UR (45 ° en haut à droite) DR (45 ° en bas à droite) UL (45 ° en haut à gauche) DL (45 ° en bas à gauche)	AT (Auto-test) SW (Special wording - specify) WG (Wireguard) PK (Pendant kit - specify length) 90SP (90 minute emergency) 120SP (120 minute emergency) PA (Polished aluminum finish)

NOTE: *Two pictograms or OLR must be ordered, pendant mount only.